

REVERSIBLE FRAMES FOR METAL BUILDINGS

SERIES F-16-4 (1-3/4" 16 GAUGE)

SPECIFICATIONS

Reversible Metal Building Frames shall be furnished by Premier Products, Inc., Monroe, LA, fabricated from 16 gauge minimum spangle hot dipped Galvannealed steel mill treated for proper paint adhesion. Bends will be brake formed to assure true, sharp radii and to minimize camber.

Series F16-4 Reversible Metal Building Frames shall receive a modified alkyd primer utilizing a dip process to insure complete coverage. Pre-finished frames are to receive a primer base, plus finish coat providing a double thickness of protection.

Head and jamb corner brackets shall be projection welded to frame members and pre-punched for field assembly with 5/16" bolts, providing a simple rigid frame connection.

Series F16-4 Reversible Metal Building Frames consist of three pieces, including the bolts and nuts required for assembly. All necessary reinforcements, clips, and anchors will be welded at the factory prior to shipment.

Standard hardware preparations for Series F16-4 Reversible Metal Building Frames will be 3 - 4-1/2" (.134/.180) Std/Hvy weight hinges and an ANSI A115.1 or A115.2 (4-7/8") universal strike. Each of the hinge reinforcements will be 7 gauge steel projection welded to the frame in eight places.

All pre-finished Metal Building Frames will be packaged in a cardboard carton. Hinge, Strike and Head will be interleaved with microfoam the full length of the carton to prevent damaging the finish. Hardware and/or accessory items will be placed in the head section. The carton will be banded in three places. End flaps will have identifying Number and the Description of the contents. Cartons will be palletized in modules of 20 per pallet (10 High and 2 Deep) with entire pallet being banded in three places for shipment and storage.

A complete technical service is available to metal building manufacturers. Let a Premier professional assist you in designing a walk door system which is tailored to your needs.

NOTE: We reserve the right to make changes in specifications, construction, design and details, without notice, at any time in such a manner as we deem necessary.


REVERSIBLE GALVANNEALED STEEL FRAMES

3070 STANDARD


STANDARD SIZES
AVAILABLE

3070, 4070, 6070, 8070
OTHERS AVAILABLE
UPON REQUEST


TYPICAL ELEVATION

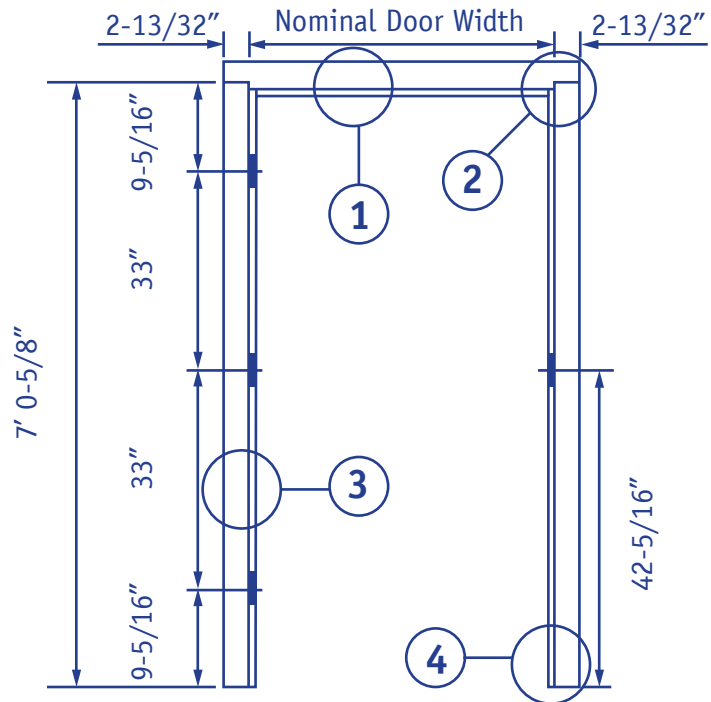

OPEN-BACKED FRAME

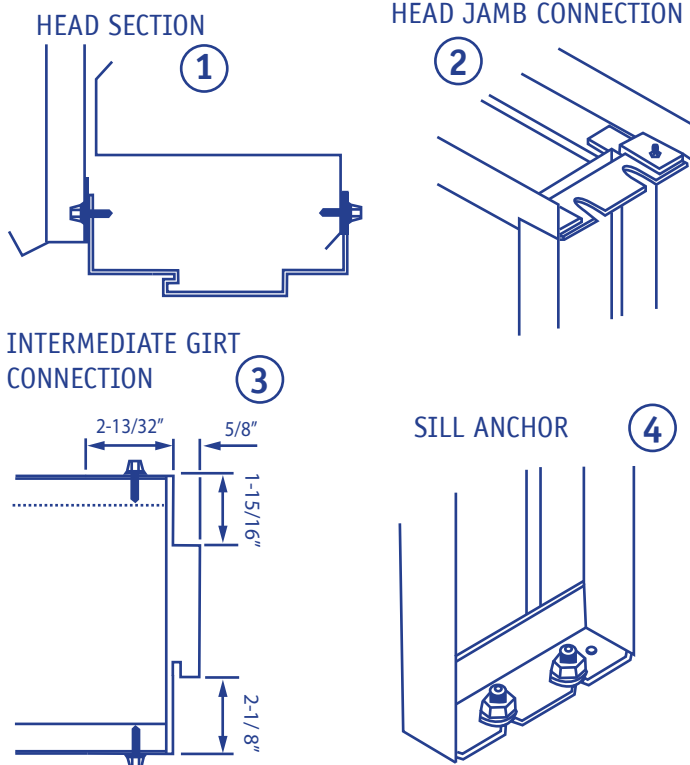


REVERSIBLE 5-3/4" FRAME

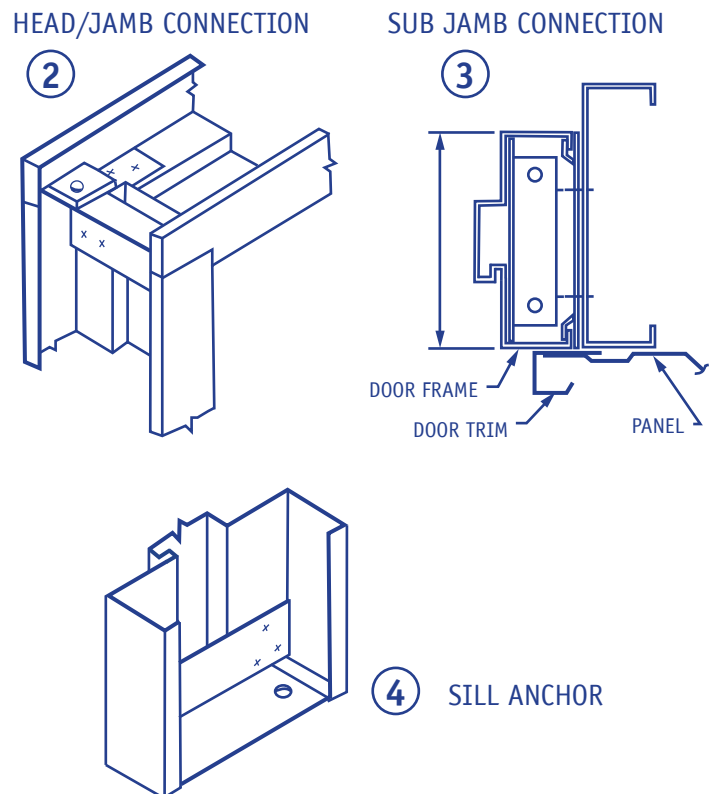


HARDWARE PREPARATIONS

HINGES




7 GAUGE STD/HVY WEIGHT REINFORCEMENT
WITH 4-1/2" X 4-1/2" FULL MORTISE
HINGE PREPARATION

STRIKES



14 GAUGE STRIKE REINFORCEMENT WITH
ANSI A115.1 OR A115.2 UNIVERSAL STRIKE
PREPARATION (4-7/8" HIGH)


FRAME DEPTHS AVAILABLE

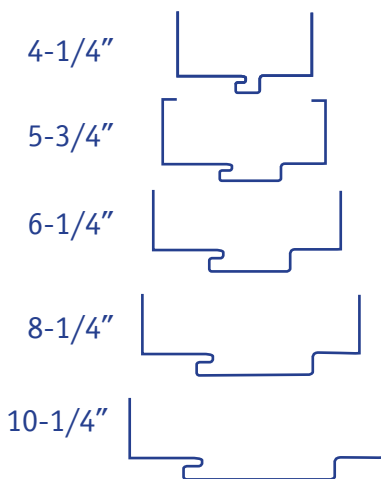


OTHER PROFILES AND
DESIGNS AVAILABLE
UPON REQUEST

JAMB EXTENSIONS

FOR FRAME ATTACHMENT
TO GIRTS OVER
7'2" IN HEIGHT

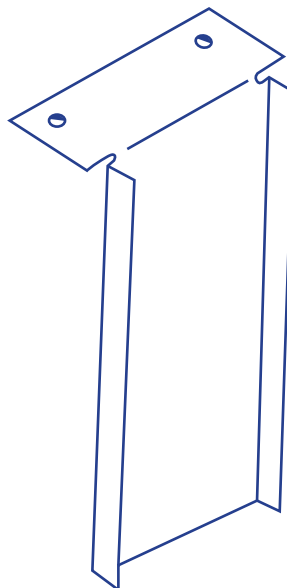

SUB JAMB MOUNTING

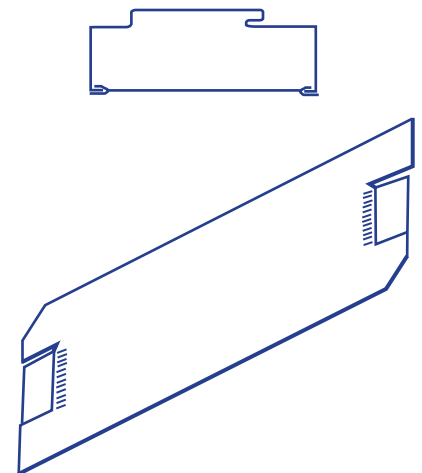

**TWIST IN PLATE FOR
FLUSH MOUNTING TO
SUB JAMBS**

ERECTION INSTRUCTIONS FOR PREMIER SERIES REVERSIBLE FRAMES

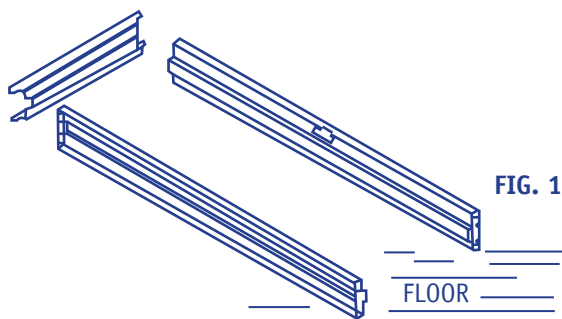


FIG. 1

STEP II Install Pre-Notched Threshold, utilizing the Spring Clips which are already installed in the Threshold (See Fig. 3)

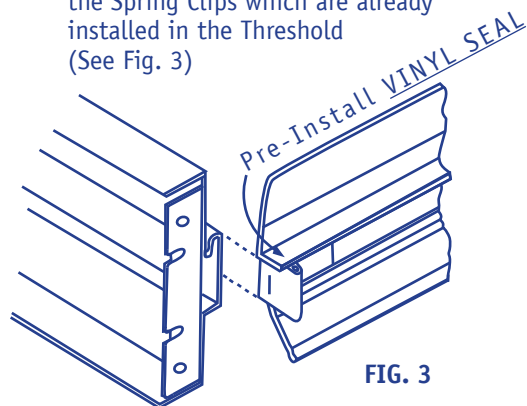


FIG. 3

STEP IV Tilt up the entire assembly and secure Hinge Jamb Anchor to floor. Plumb Hinge Jamb and Assembly.

NOTE: Steps III and IV may be reversed at option of erector.

STEP V Anchor Head and Strike Jamb to Building Structure, Floor and entire Frame to Panel Skins. Install Optional Threshold Anchor if desired. (Not a part of Single Opening package.)

STEP I Place head Section and Jambs on flat surface (floor) with Door side up. (See Fig. 1) Install Bolts and Nuts connecting Head to Jambs. Be sure that Head is tight to Jambs so that the proper Door Opening is obtained. EXAMPLE: 3'0" Door requires a 36" Frame Opening. (See Fig. 2)





FIG. 2

STEP III Install Kerf weatherstripping, next install Door in Frame, check for 1/8" clearance at head and 3/32" clearance at Strike Jamb. (See fig. 4)

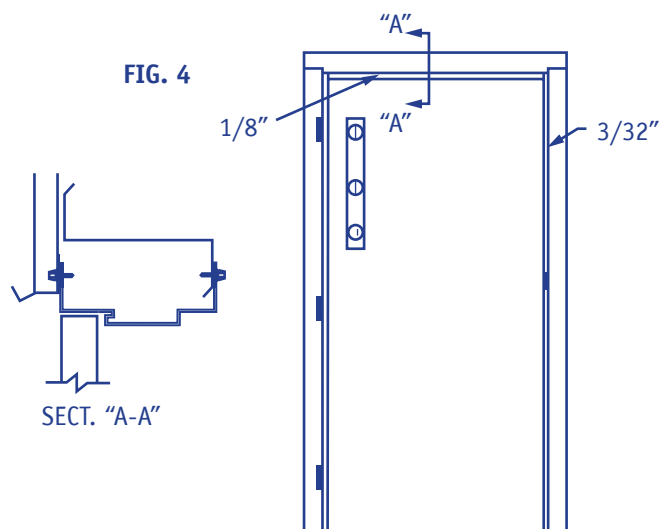

Premier provides a complete total openings package that includes the walk door, frame, hinges, thresholds, locksets and weatherstripping.

REGIONAL SALES OFFICES & WAREHOUSES

MONROE, LA

Administration/Corporate Office
Ph: (318) 361-0796
TF: (800) 962-6517
Fx: (318) 323-5068

PO Box 7269
Monroe, LA 71211

ATLANTA, GA

Ph: (770) 944-1006
Fx: (770) 944-0963

6945 Oakridge Pkwy Suite 207
Austell, GA 30168

HOUSTON, TX

Ph: (713) 690.0435
Fx: (713) 690.8241

4660 Pine Timbers #126
Houston, TX 77041

ORLANDO, FL

Ph: (800) 962.6517
Fx: (713) 690.8241

410 Santa Rosa Court
Oviedo, FL 32765

PREMIER

ASSA ABLOY

TrustPremier.com